

NOTE: SETTING BLOCK
FULL WIDTH OF GLAZING
POCKET. IF NOT, IT CAN
CREEP IN OR OUT POSSIBLY
ALLOWING ONE OF THE
LITES OF GLASS TO SLIP DOWN

SETTING BLOCK NOTCHED
TO ALLOW PASSAGE OF
WATER TO WEEPS

PRESSURE PLATE/BAR

HORIZONTALS:
3 WEEP HOLES / LITE
OF GLASS. MINIMUM
3/8" SIZE IN AT LEAST
ONE DIMENSION TO
PREVENT CAPILLARY
BRIDGING

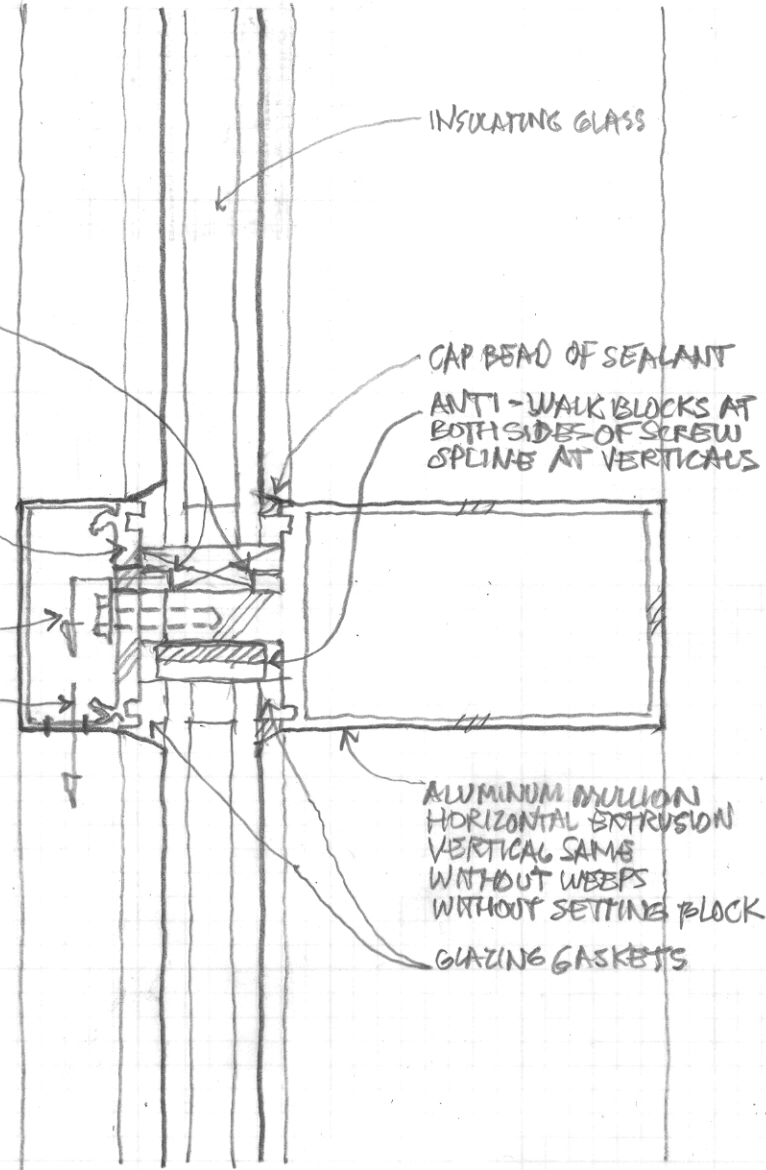


FIGURE S-5
CURTAIN WALL INTERMEDIATE HORIZONTAL & VERTICAL
STICK-BUILT SYSTEM (PE'D)
OUTSIDE GLAZED

NOTE: SETTING BLOCK
FULL WIDTH OF GLAZING
POCKET. IF NOT, IT CAN
CREEP IN OR OUT POSSIBLY
ALLOWING ONE OF THE
LITES OF GLASS TO SLIP DOWN

SETTING BLOCK NOTCHED
TO ALLOW PASSAGE OF
WATER TO WEEPS

PRESSURE PLATE/BAR


HORIZONTALS:
3 WEEP HOLES/LITE
OF GLASS. MINIMUM
3/8" SIZE IN AT LEAST
ONE DIMENSION TO
PREVENT CAPILLARY
BRIDGING

THERMAL BARRIER (YELLOW)

WATER BARRIER

RAINSCREEN

DRIPS (AT HORIZONTALS)

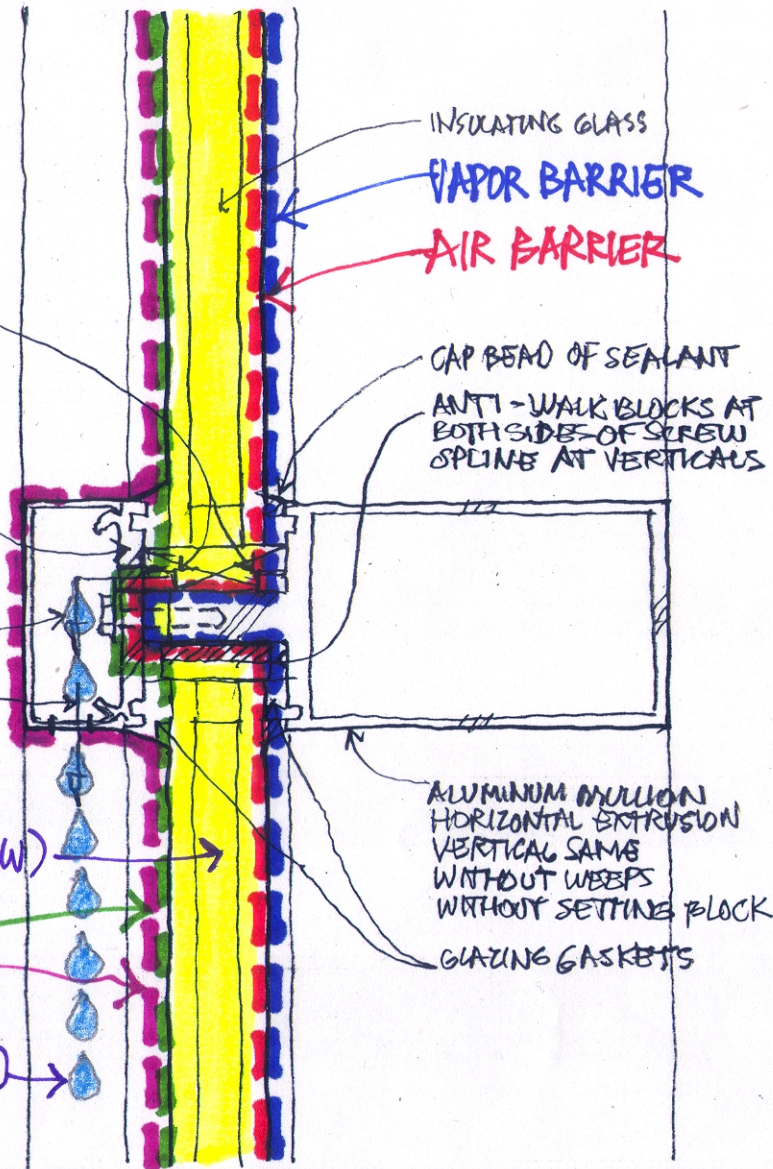

INSULATING GLASS

VAPOR BARRIER

AIR BARRIER

CAP BEAD OF SEALANT

ANTI-WALK BLOCKS AT
BOTH SIDES OF SCREW
SPLINE AT VERTICALS

ALUMINUM MULLION
HORIZONTAL EXTRUSION
VERTICAL SAME
WITHOUT WEEPS
WITHOUT SETTING BLOCK

GLAZING GASKETS

FIGURE S-5C

CURTAIN WALL INTERMEDIATE HORIZONTAL & VERTICAL

STICK-BUILT SYSTEM (PE'D)

OUTSIDE GLAZED