

FEATURES & SPECIFICATIONS

INTENDED USE

Recessed housing rated Non-IC. For new construction only.

Approved for all ceiling and wiring types, including air-handling plenums, and wiring types.

CONSTRUCTION

Thermally protected against improper contact with insulation and approved for through-branch circuit wiring.

One piece painted steel can.

Galvanized steel frame.

Galvanized steel junction box with (4) romex knock outs, (2) 3/4" and (4) 1/2" nominal conduit knock outs with pryout slots. Rated for through branch wiring. Removable door for easy access.

Ground wire provided. Rated for 90°C supply wire.

Factory-installed captive bar hangers span up to 24" and feature built in nailers and T-bar clips.

ELECTRICAL SYSTEM

Two-pin porcelain socket with heat shield.

Thermal protection provided against improper insulation use.

Precision wound stepdown transformer with class H insulation. For dimming control, use only dimmers specifically designed for use with electromagnetic transformers. 75W MR16 maximum.

INSTALLATION

T-bar installation or 2 x 8 wood joist.

Expandable bar hangers allow for off center mounting in wood joist or T-bar ceilings. Length of 25-1/4" maximum 13-1/4" minimum or cut to fit 7-1/2" on center joist construction.

Accommodates ceilings up to 2" thick.

Ceiling cutout 4-1/2".

LISTING


U.L. Listed to U.S. and Canadian safety standards.

Damp location listing.

Catalog Number	
Notes	Type

4" Housing



LP3V

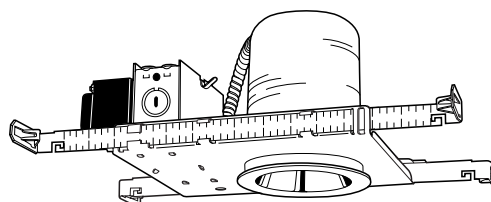

LOW VOLTAGE

Non-IC

New Construction

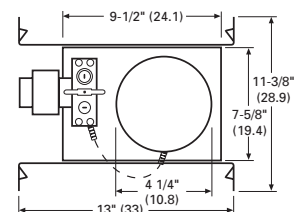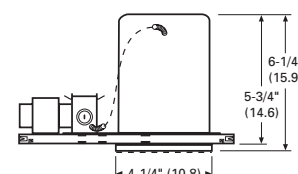

Specifications

Height: 6-1/4 (15.9)

Length: 11-3/8 (29.9)

Width: 13-1/2 (34.3)

All dimensions are inches (centimeters).

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: **LP3V 277 3VE2**

LP3V		
Series	Voltage	Reflector
LP3V	120	3V01AZ Clear specular open
	277	3V01GZ Gold specular open
	347	3V01BLZ Black specular open
		3VB1 Black baffle
		3VB1W White baffle
		3VE1 White eyeball
		3VE2 Black baffle eyeball
		3VE2W White baffle eyeball
		3VW1 White eyelid wallwasher
		3VDW1W White directional wallwasher
		3VA5 White slotted adjustable
		3VS1 White pinhole

NOTE:

See trim specification sheets for maximum wattages.

