







A-A

HOISTWAY SECTION

SAFETY CLEARANCE BETWEEN BOTTOM
OF PLUNGER & BOTTOM OF
CYLINDER = 25.4



- NOTES:

- NOTES:





ARCHITECT/CONTRACTOR STAMP

OPTIONS		N		Y	
AUX. CAR OPERATING PANEL		N		HANDICAP REQUIREMENTS:	
CAR POSITION INDICATOR (C.P.I.)		Y		OIL ISOLATION COUPLING	Y
CAR DIRECTION INDICATOR (C.D.I.)		Y		PIT SHUT OFF VALVE	N
HALL POSITION INDICATOR (H.P.I.)		Y		MACHINE ROOM SHUT OFF VALVE	Y
SINGLE HALL RISER		Y		SEISMIC CONSTRUCTION:	Y
HALL DOWNERN:		**			
FIRE SERVICE: PH () PH II (X)		N		RIPTURE VALVE (SEISMIC)	Y
MAIN FLOOR: (1)		Y		MAIN LINE STRAINER	N
ALTERNATE: FLOOR (2)		Y		TANK HEATER	N
		Y		SCAVENGER PUMP	Y
RELATED WORK BY OTHERS					

SEISMIC RAIL REACTIONS	
R1 =	1148
R2 =	574


BUFFER REACTION
CAR = 5153.5












(EACH BUFFER)

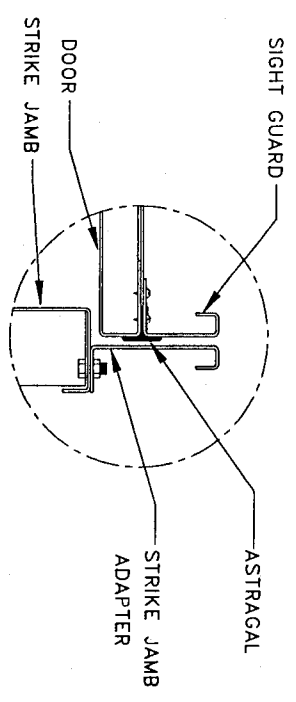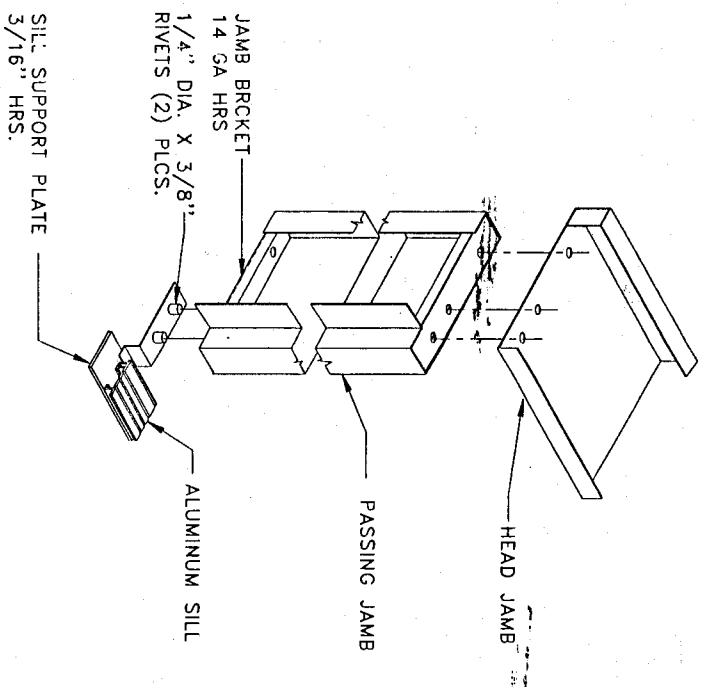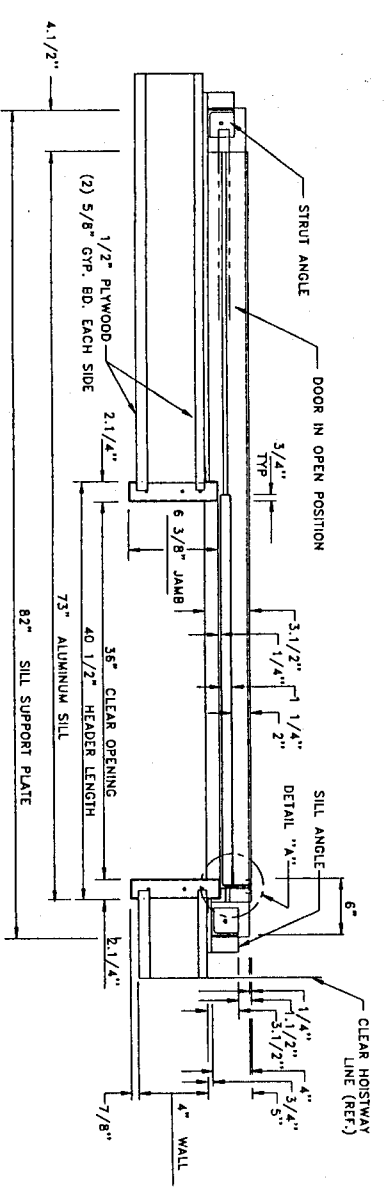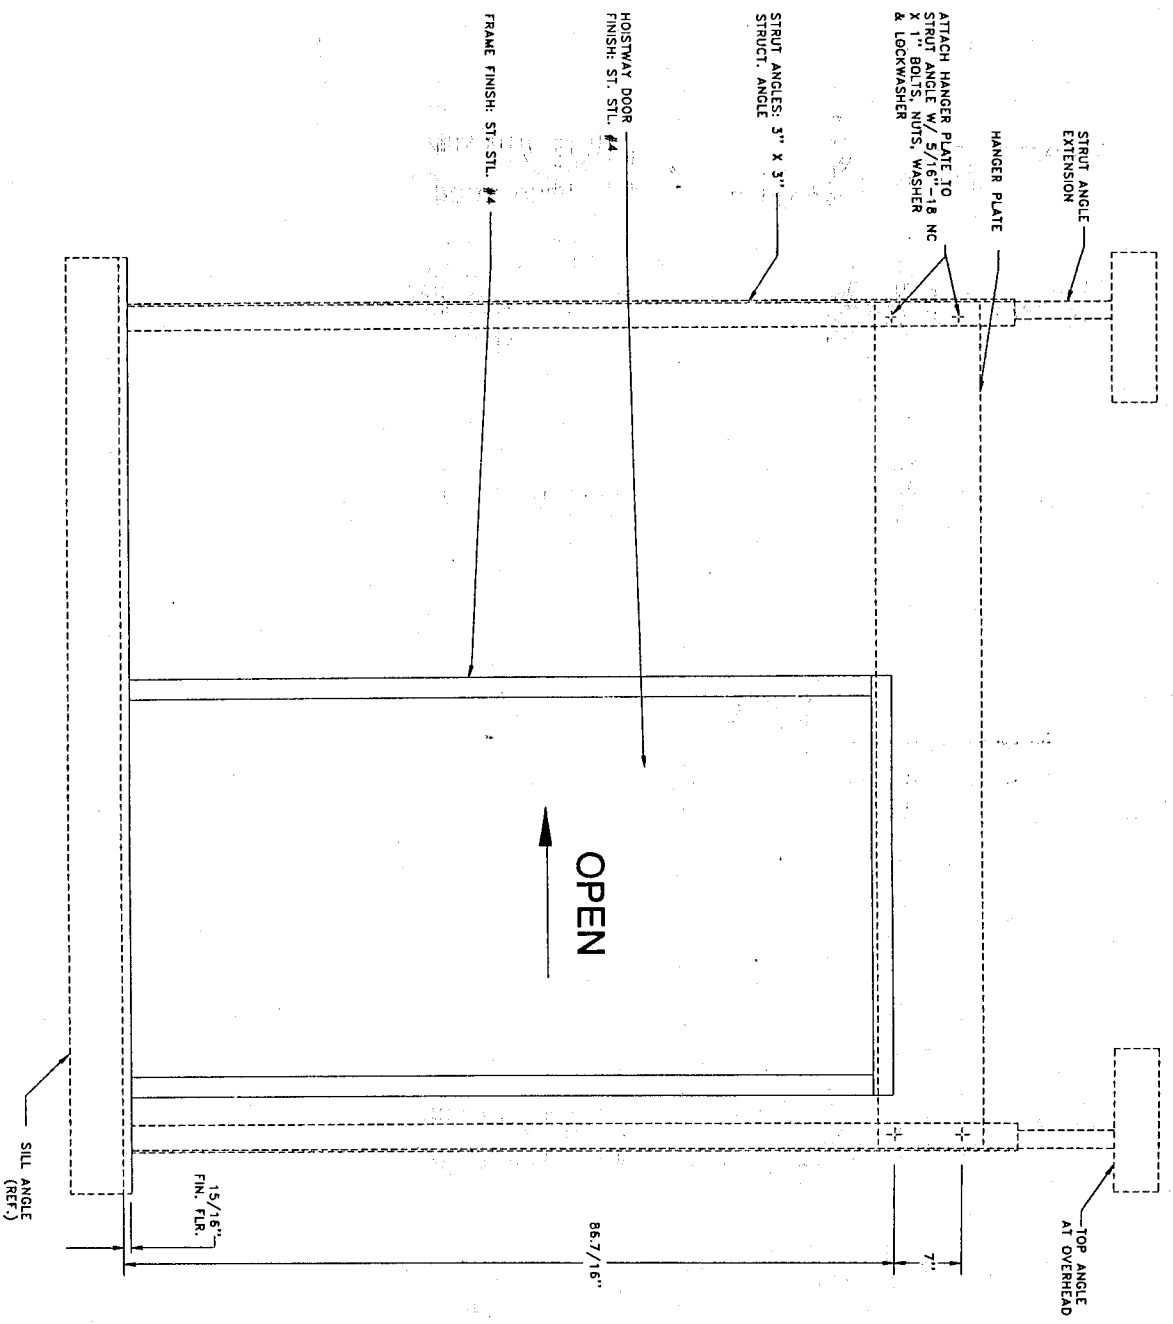

NOTES:

1. GROUTING AS REQUIRED BY OTHERS.
 2. (2) ASSEMBLES REQUIRED TOTAL
- FRAME FINISH: ST. STL. #4
DOOR FINISH: ST. STL. #4

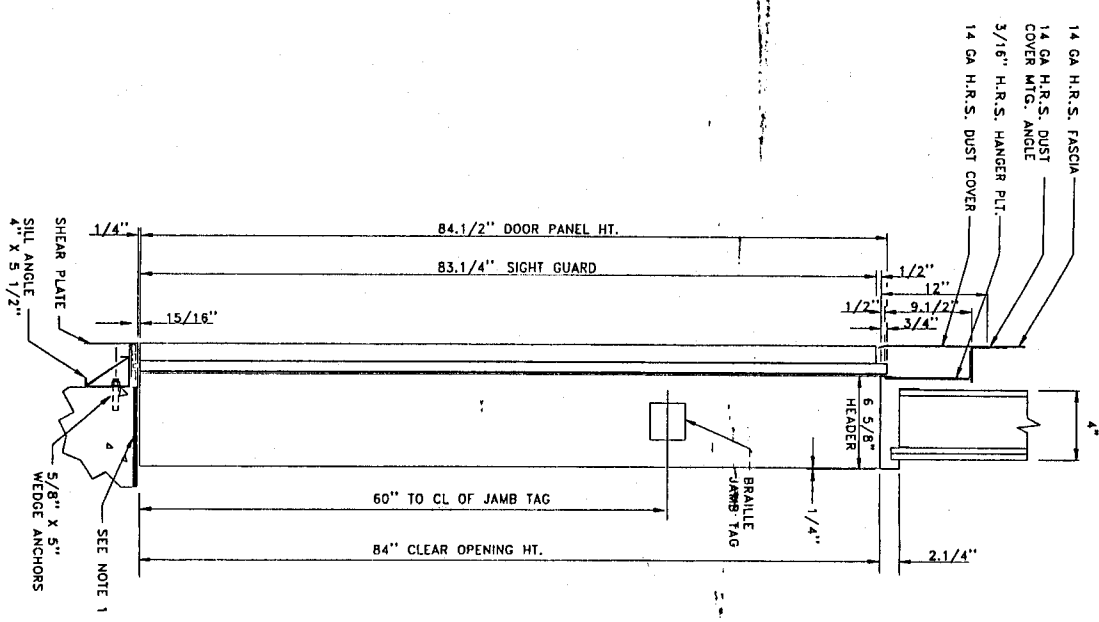

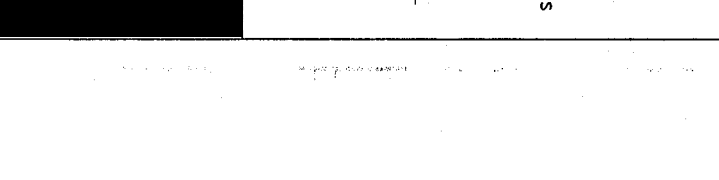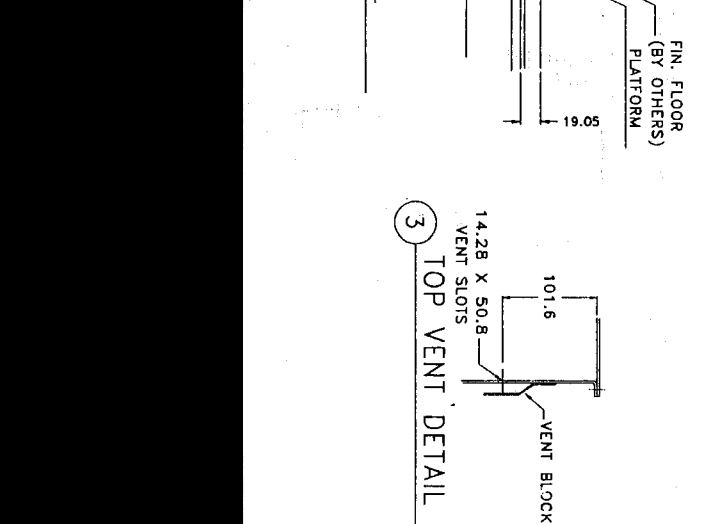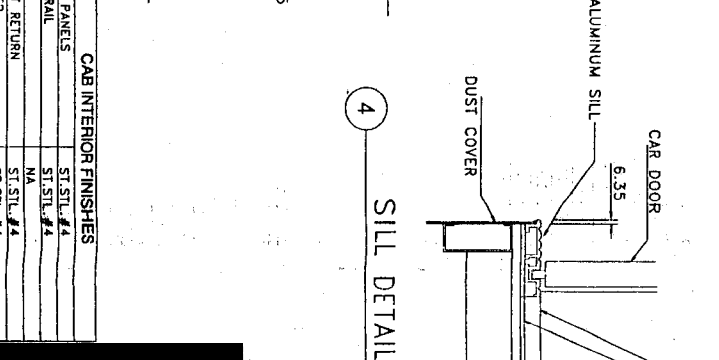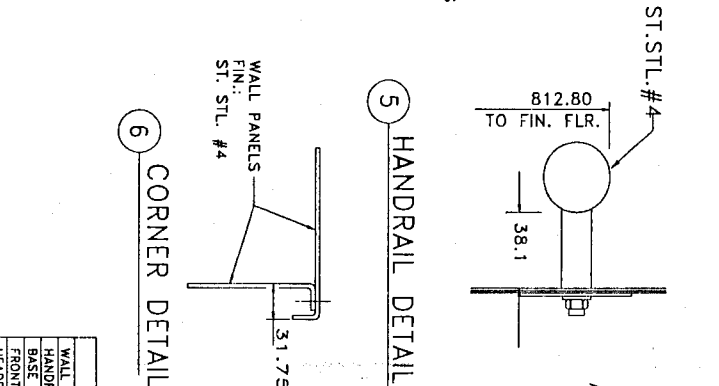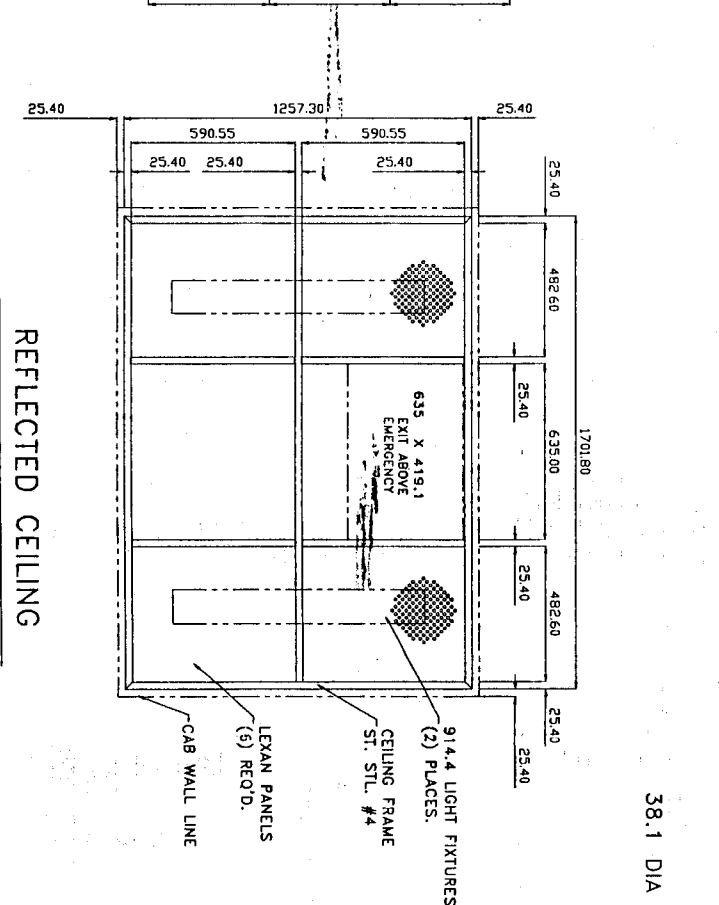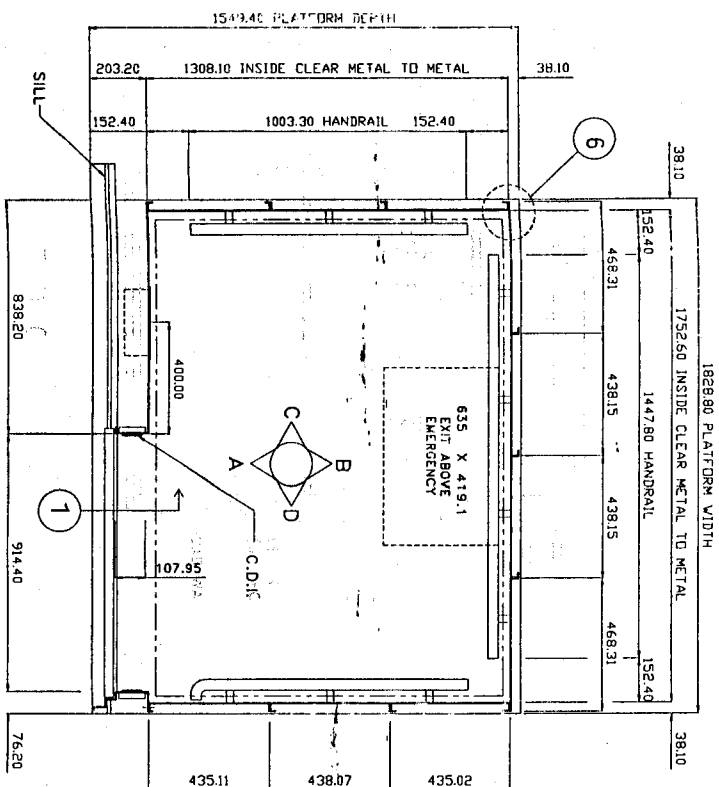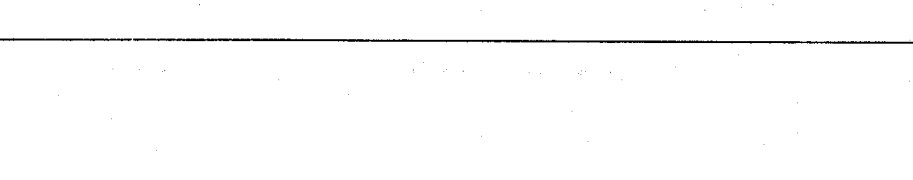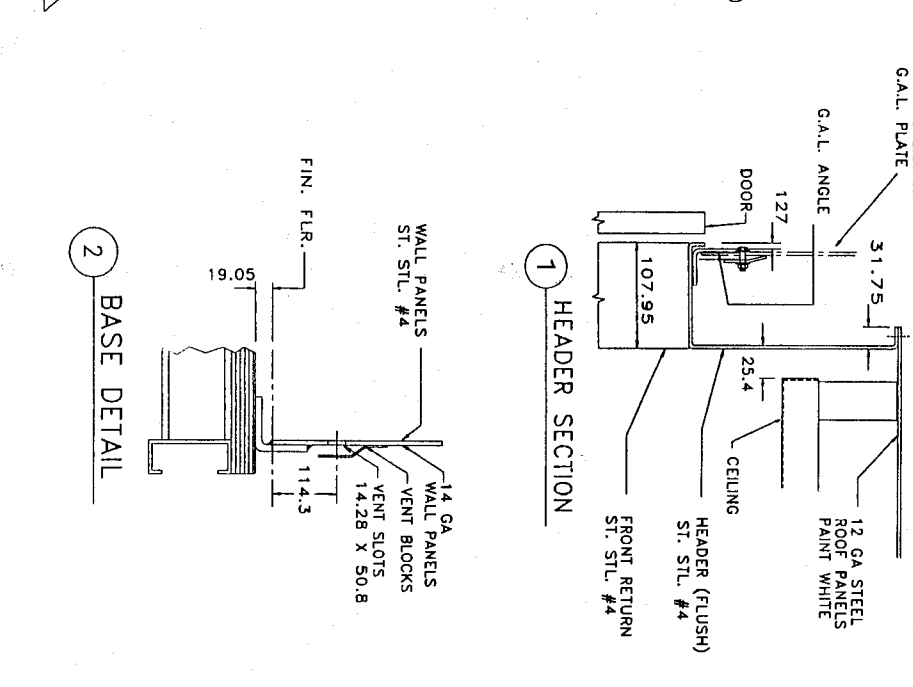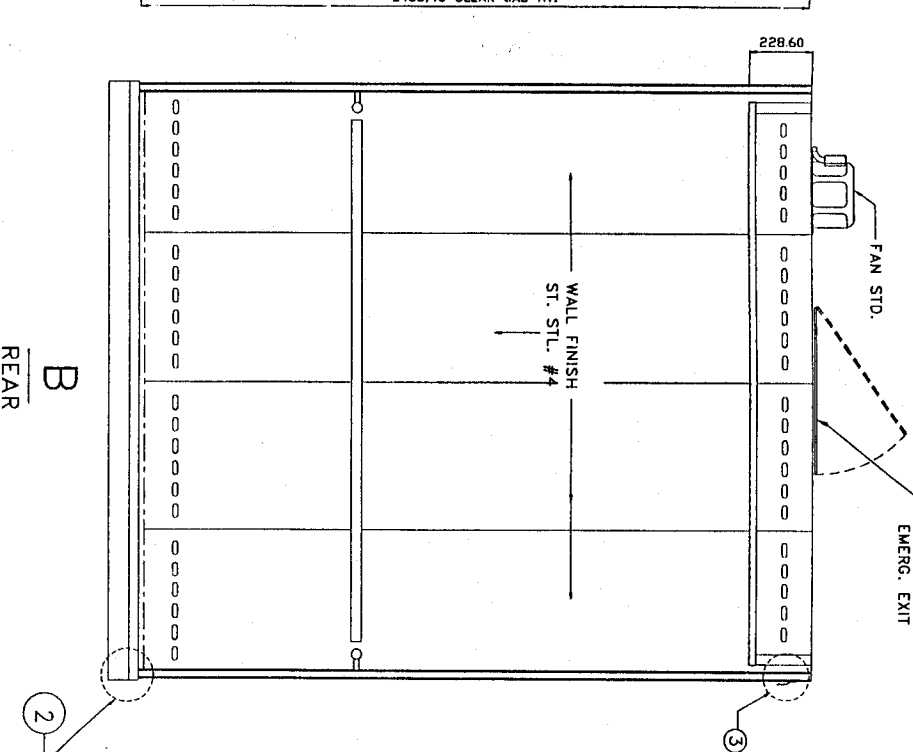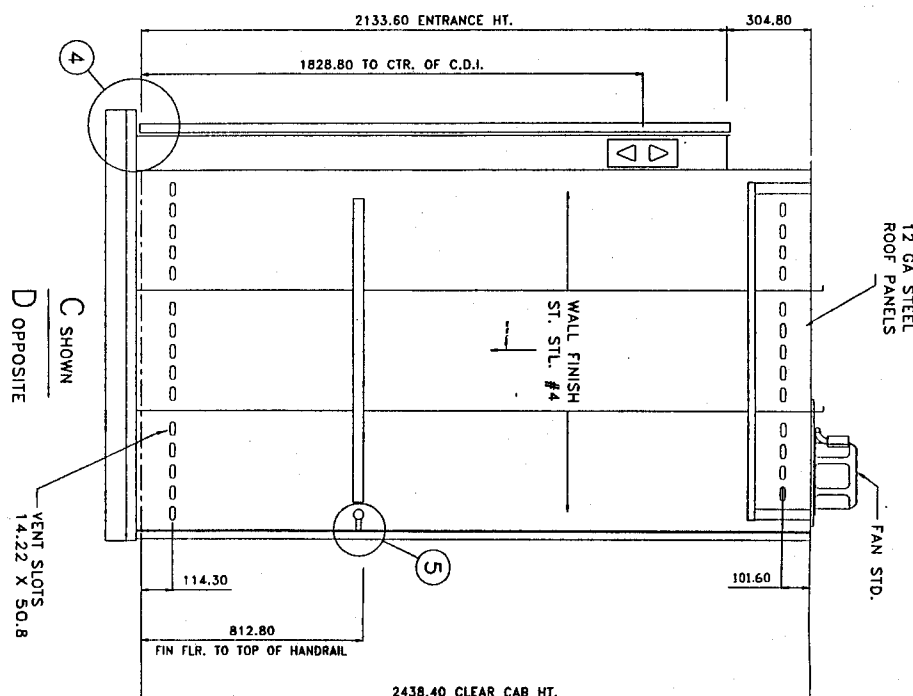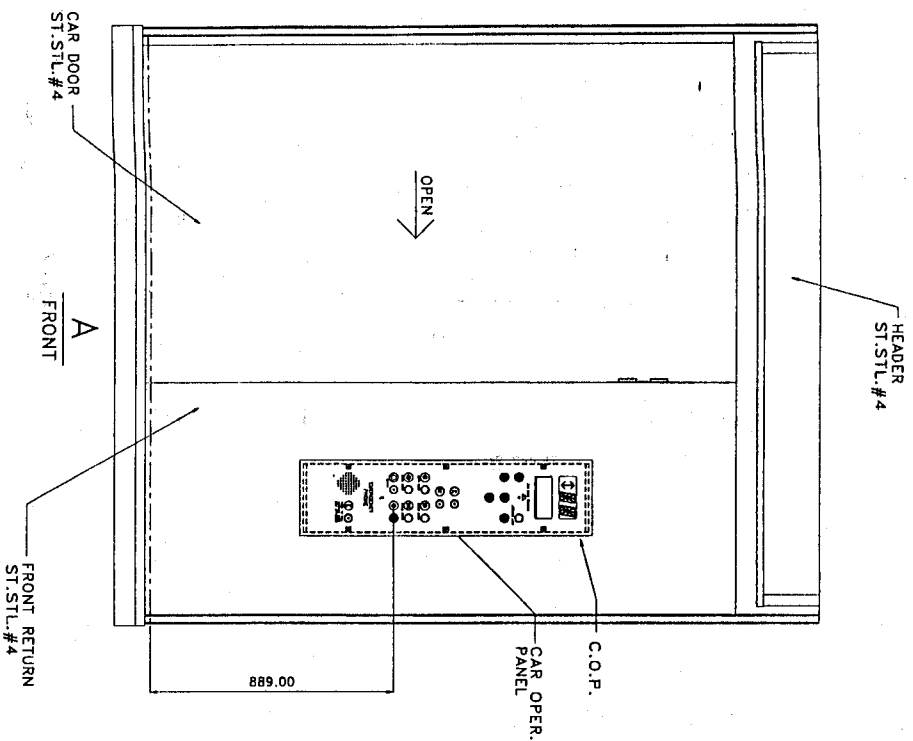

NOTA: ALL THE MEASUREMENTS ON THE DRAWING ARE IN METRIC (mm.)
ELEVATOR CAB CONSTRUCTION CONFORMS TO ASME A-17.1, INCLUDING FIRE RATING.

NOTES:
1.- CAB EXTERIOR TO RECEIVE SOUND DEADENING MASTIC
2.- CAB VENTILATION AREA = 3303 mm²

CAB INTERIOR FINISHES	
WALL PANELS	ST. STL. #4
HANDRAIL	ST. STL. #4
BASE	NA
FRONT RETURN	ST. STL. #4
HEADER	ST. STL. #4
CAB DOORS	ST. STL. #4
ACCESSORIES	
CAB OPER. PANEL	ST. STL. #4
CAB POSITION INDICATOR	DIGITAL
CAB DIRECTION INDICATOR	ST. STL. #4
PHONE CABINET/GRILLE	Y
SERVICE CABINET	N/A
P.O. HOOKS	Y
PHOTO- EYES	INFRARED-ILLUMINIS
FAN	FAN/2-SPD
EST. CAB WEIGHT	2463-185

CALL CANCEL P.B.
ENGRAVE HELVETICA MED.
BLACK INFILL

FINAL

MOUNTING HOLES
.19" Ø CSK. FOR
6-32 V.R. SCREWS 6-PLCS.

REVISION

42.00"
(59" A.F.F.)
41.50"
40.63"
40.13"

FIRE LIGHT & BUZZER

38.50"

35.00"

32.69"

31.50"

30.50"

29.38"

INDEPENDENT SERV.

27.25"

25.50"

24.62"
(41.62" A.F.F.)

SURVIVOR PLUS
VANDAL RESISTANT P.B.S
SEE DETAIL

22.50"

21.56"

20.13"

18.00"
(35" A.F.F.)

EMERG. STOP
KEYED SW.

14.50"

13.75"

ENGRAVE .50 HIGH
BLACK PAINT FILL.

11.50"

10.44"

10.00"

9.56"

9.38"

ENGRAVE .25 HIGH
BLACK PAINT FILL.
4" X 5 7/8"

7.30"


3.36"

2.38"

0.50"

0.00"

(17.00" A.F.F.)

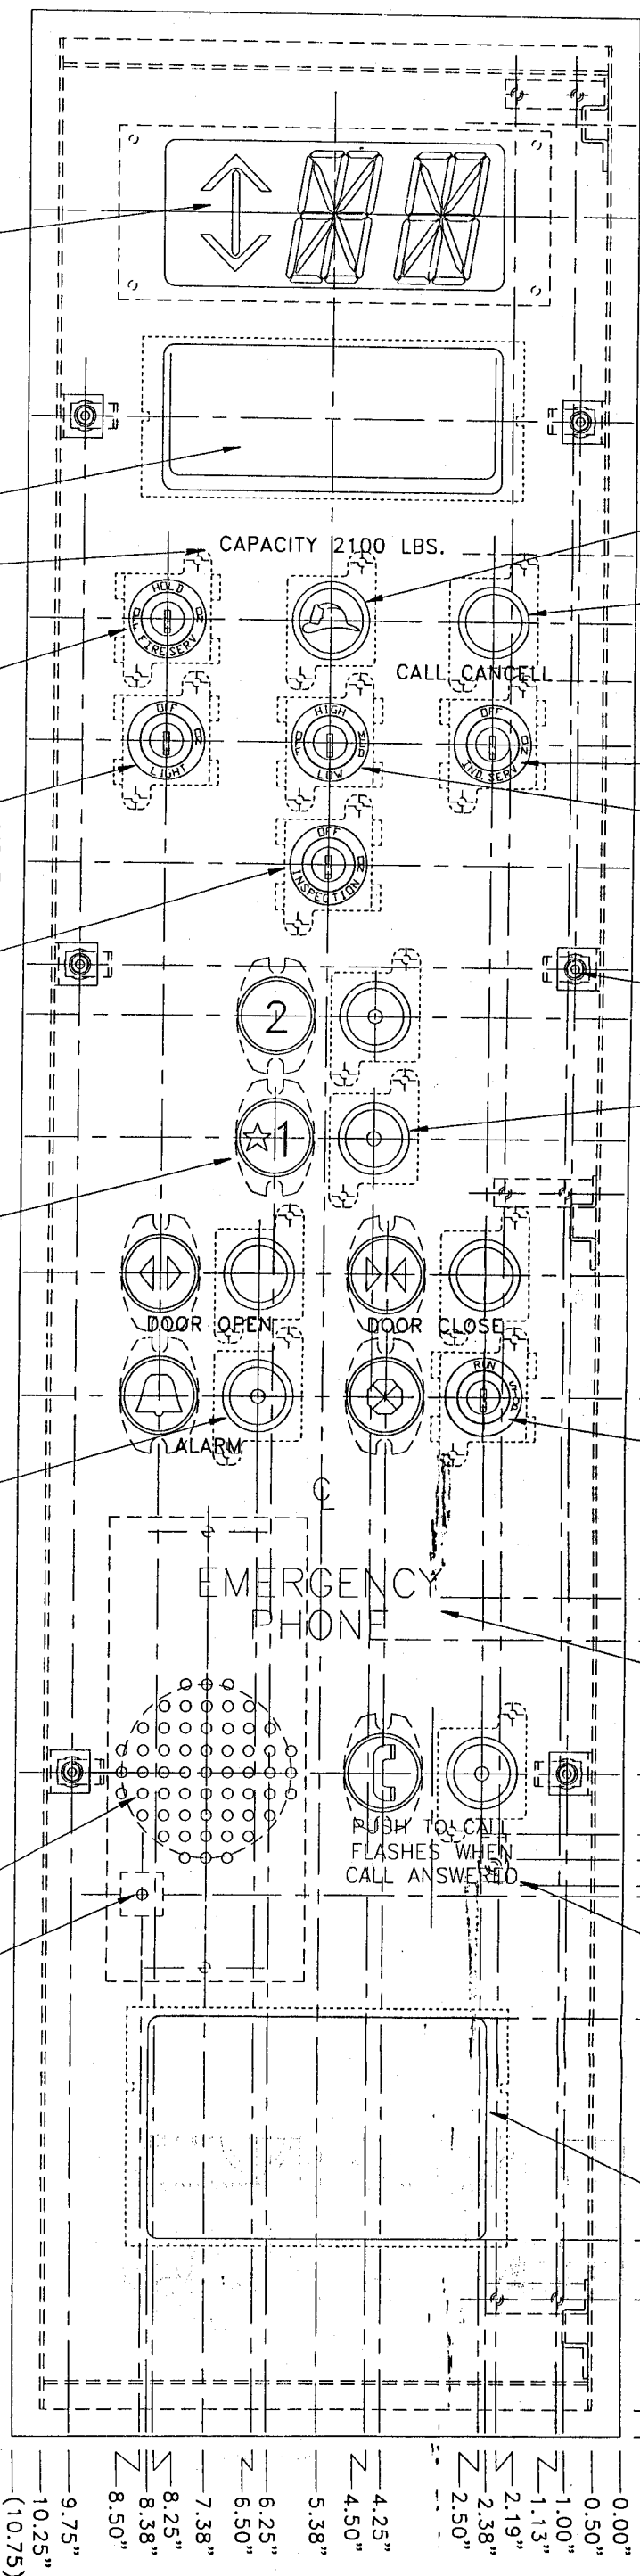

V.R. MAIN C.O.P. PLATE

QTY. (1) REQ'D. R/H HINGES AS SHOWN

BOX SIZE: 9.75" X 41.00" X 3.5"



CUT OUT: BOX SIZE + 0.125

NOTES
MATERIAL: 11GA. ST. STL. #4
SHEAR ALL EDGES DOWN

ENTRADA BRAILLE 1.38" Ø PUNCH
.63" HIGH CHARACTER ON
BLACK BACKGROUND.






ADAMS SURVIVOR P.B. ASSEMBLY
CALIFORNIA RAISED
1.156 Ø PUNCH.
BORE OUT TO 1.25 Ø

VANDAL RESIST. SW.
ALUMINUM BEZEL ASSY.
1.38 Ø PUNCH.



PUNCH DETAIL

120 V. LED'S

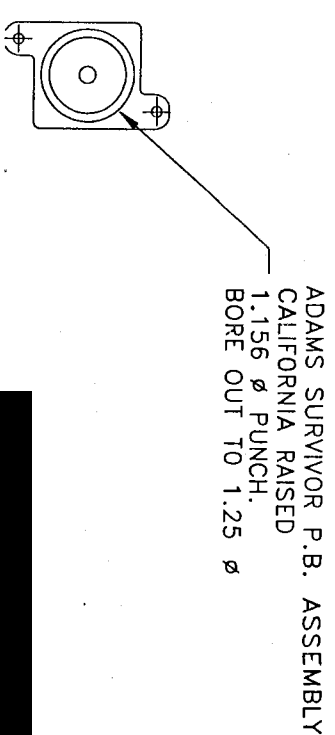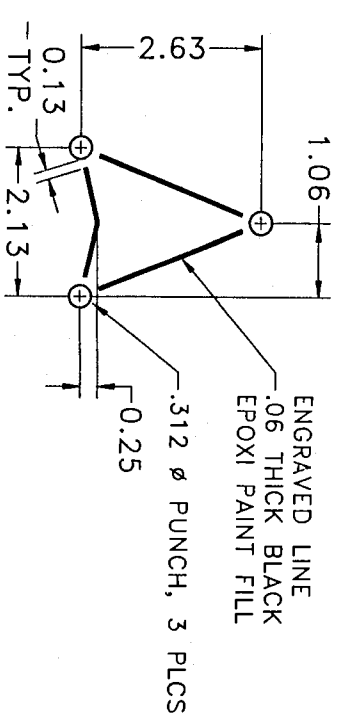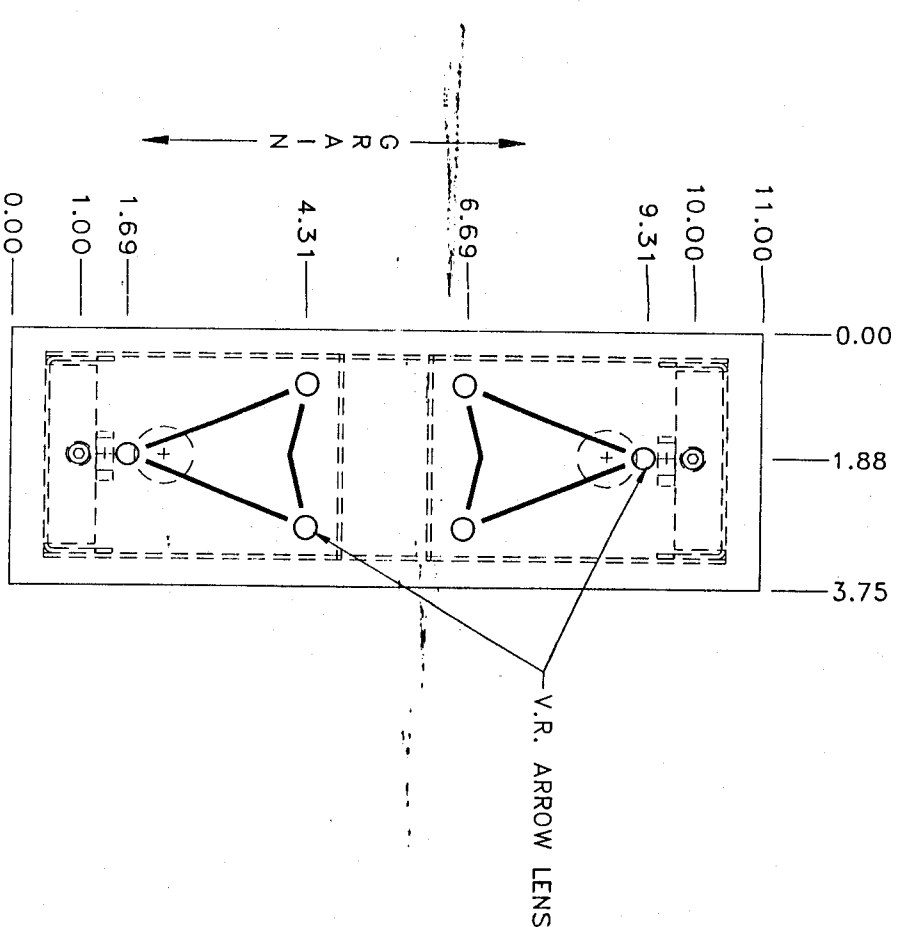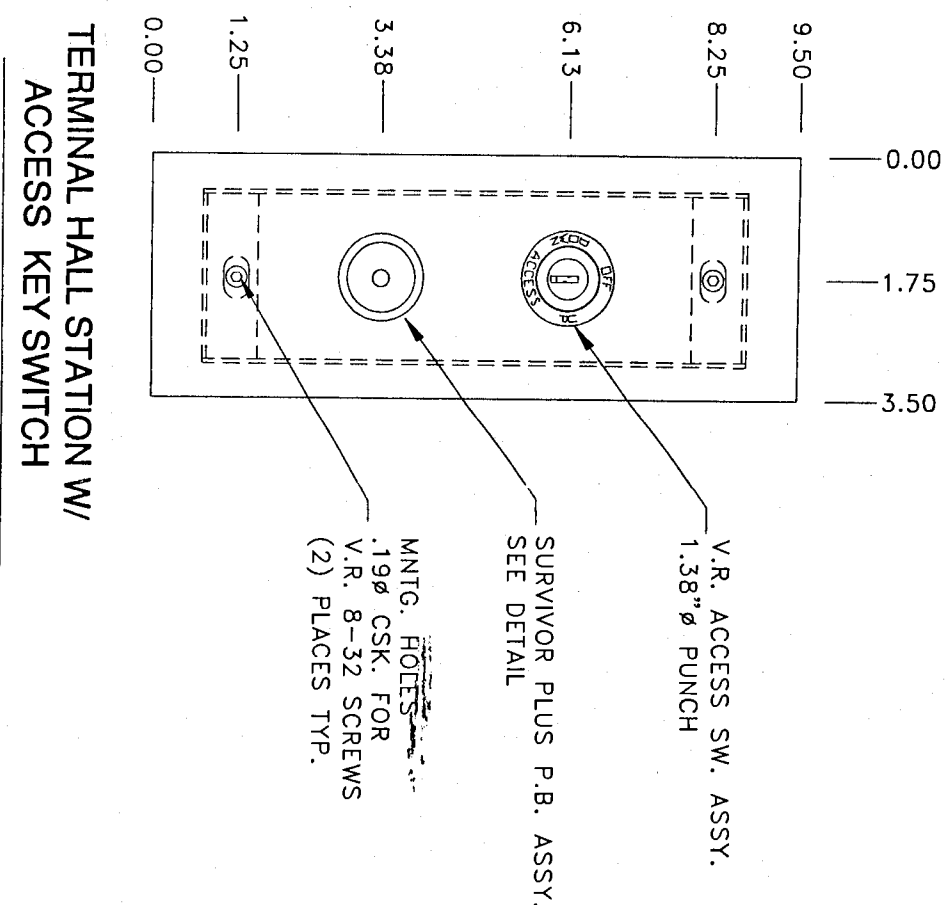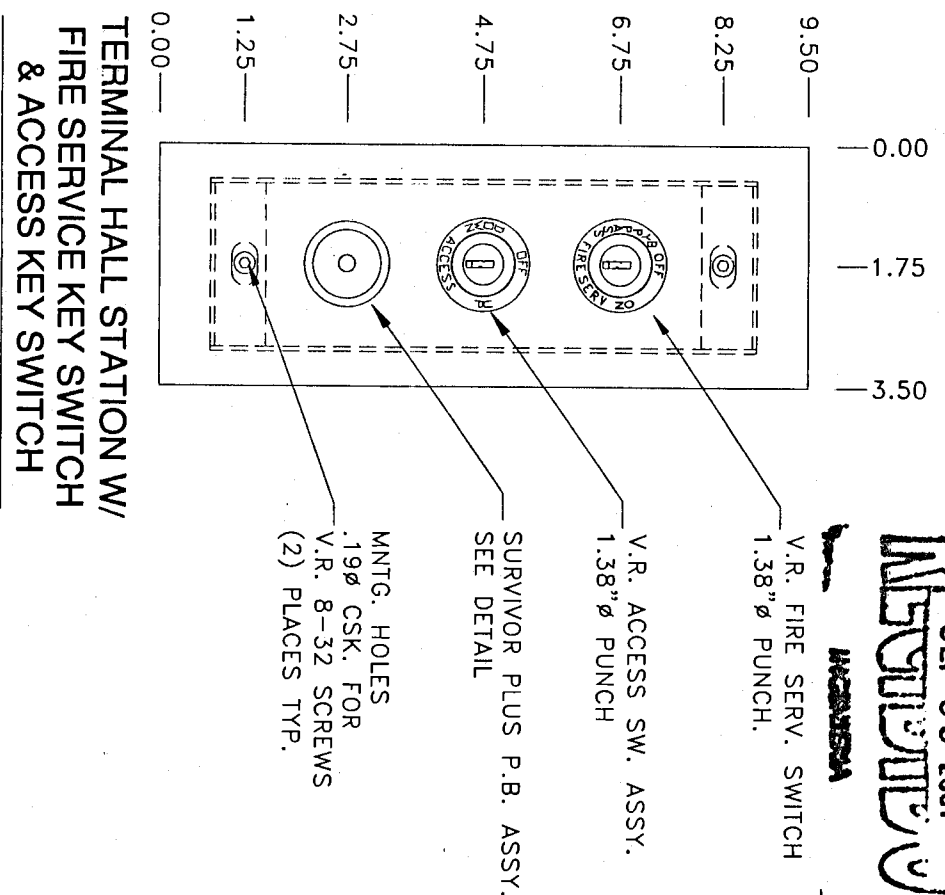

NOTES

MATERIAL: 11GA. ST. STL. #4

SHEAR ALL EDGES DOWN