

FOR NON-U.S. MARKETS ONLY

TYPE:

CATALOG#:

DESCRIPTION

SPECIFICATION FEATURES

The ALURA AHC-226E Compact Fluorescent fixture offers high performance with two 26W DTT horizontally mounted compact fluorescent lamps (lamps not included).

APPLICATION

The AHC-226E is suited for non-insulated ceilings in residential and commercial applications.

A...Reflector
.040 spun aluminum with clear specular reflector.

B...Frame and Mounting Legs

Precision die stamped steel frame. Adjustable mounting legs accommodate a maximum ceiling thickness of 1 1/4" (32mm).

C...Trim

Post fabrication painted with baked enamel. Standard color is white.

D...Ballast



UNV 120-277V, 50/60Hz High Power Factor electronic ballast with end of life protection for 2x26W DTT compact fluorescent lamps. UL Listed and NOM Certified.

E...Socket

Compact fluorescent sockets for 4-pin 26W DTT compact fluorescent lamps. Lamp base G24Q-3. UL Listed and NOM Certified.

Labels

NOM Certified
IP44 (with lens)

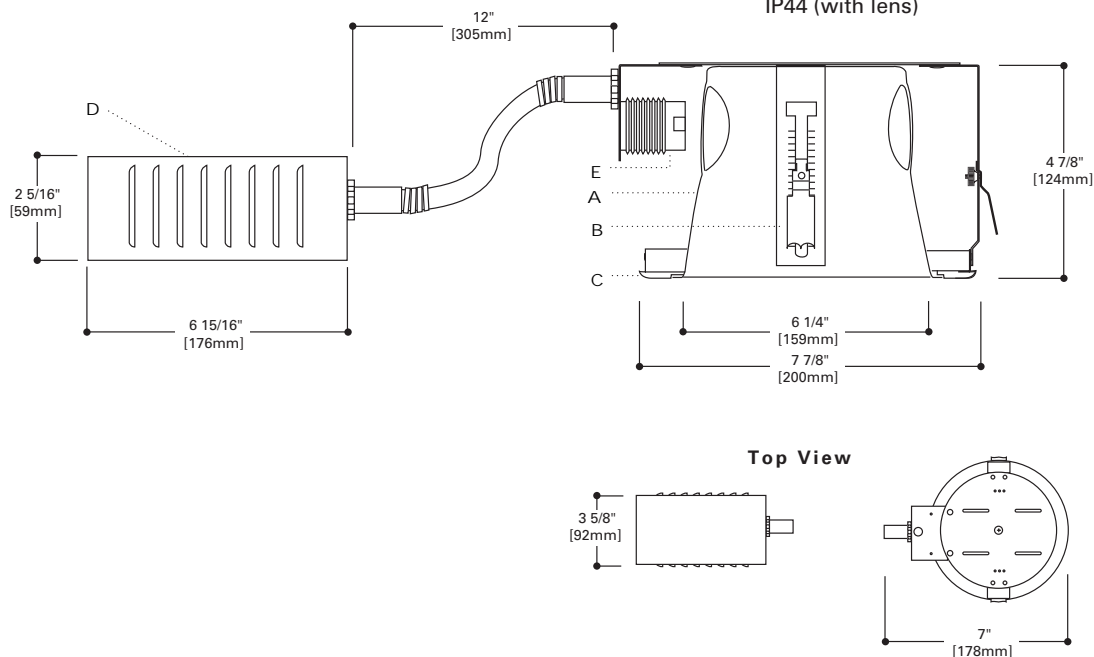

AHC-226E

26W DTT

**8" RECESSED
FIXTURE
NON-INSULATED
CEILING
SPECULAR REFLECTOR**

Energy Data

(2) 26W DTT 4-Pin Lamps
Ballast: High Power Factor.
120V Line Amps: 0.43A - 0.55A
277V Line Amps: 0.19A - 0.24A

ORDERING INFORMATION

SAMPLE NUMBER: MEX-AHC-226E

Complete unit consists of housing and trim (lamps not included).

Prefix	Housing	Wattage/Ballast	Voltage	Options
MEX	AHC	226E		
MEX=NOM Certified	AHC=Alura by Halo Compact Fluorescent	226E=2 x 26W with electronic ballast (lamps not included)	UNV=120-277V 50/60Hz	GL=Glass Lens (Frosted Circle)

Shipping Dimensions

	Qty.	Cubes [m³]	Wt [kg]
Unit Carton	1	0.48 [0.13]	4.10 [1.85]
Master Carton	12	6.5 [1.70]	49.0 [22.0]

Note: Specifications and Dimensions subject to change without notice.

Visit our web site at www.cooperlighting.com