

## BARDON™ 1/8th GPF

### HIGH EFFICIENCY URINAL (HEU) K-4904-ET

#### Features


- Vitreous china
- Washout
- 3/4" top spud
- 14" (35.6 cm) extended rim
- 0.125 gpf (0.473 lpf)
- WaterSense® compliant when used with K-10668 or K-10949



#### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ADA
- ICC/ANSI A117.1
- ASME A112.19.2/CSA B45.1
- Energy Policy Act of 1992
- EPA WaterSense®

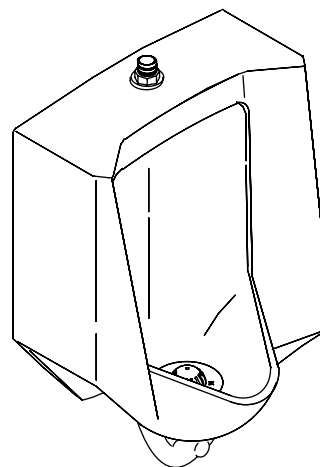

#### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

#### Accessories

- CP: Polished Chrome

#### Specified Model

| Model                          | Description   | Colors/Finishes             |                                     |
|--------------------------------|---|-----------------------------|-------------------------------------|
| K-4904-ET                      | High Efficiency Urinal (HEU) with 3/4" (1.9 cm) top spud                | <input type="checkbox"/> 0  | <input type="checkbox"/> Other_____ |
| <b>Recommended Accessories</b> |   |                             |                                     |
| K-10668                        | 0.125 gpf (0.47 lpf) Touchless DC flushometer with WAVE technology      | <input type="checkbox"/> CP |                                     |
| K-10949                        | 0.125 gpf (0.47 lpf) Touchless DC flushometer with TriPoint™ technology | <input type="checkbox"/> CP |                                     |

#### Product Specification

Washout urinal shall be made of vitreous china with a 3/4" (1.9 cm) top spud. Urinal shall have a 14" (35.6 cm) extended rim. Urinal shall use 0.125 gpf (0.47 lpf). Urinal shall be WaterSense compliant when used with K-10668 or K-10949. Urinal shall be Kohler Model K-4904-ET-\_\_\_\_\_.

# BARDON™ 1/8th GPF

## Technical Information

|                 |                               |
|-----------------|-------------------------------|
| Fixture:        |                               |
| Configuration   | 3/4" (1.9 cm) top spud urinal |
| Water per flush | 0.125 gpf (0.473 lpf)         |
| Spud inlet size | 3/4" (1.9 cm)                 |

|                      |       |
|----------------------|-------|
| Included components: |       |
| 3/4" inlet spud      | 18376 |
| 2" outlet spud       | 18766 |
| Strainer             | 85061 |
| Hanger (2 required)  | 64512 |



## Installation Notes

Install this product according to the installation guide.

Refer to manufacturer's instructions and local codes for flush valve requirements.

Will comply with **ADA** when installed per Section 605 Urinals of the Act.

\*Urinal complies with ADA requirements when rim is mounted no higher than 17" (43.2 cm) from finished floor.

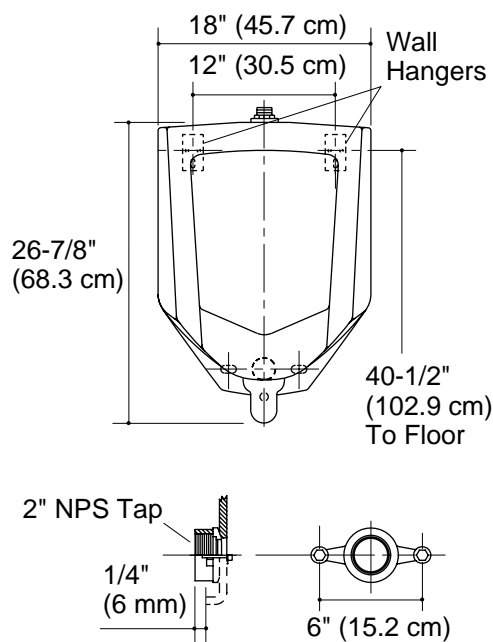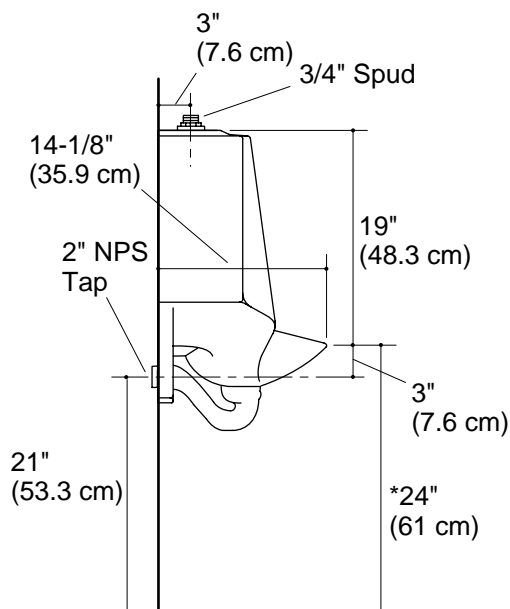

Outlet Detail

## Product Diagram