

# 548 Darkroom Safelights Series

## Incandescent Safelights



Morlite's darkroom safelights are available in single, double or triple compartments for use in X-Ray or Film Processing rooms.

### Features

- 18 gauge die-formed cold rolled steel housing with welded seams. Optional stainless steel housing available. Choice of single, double or triple compartments.
- One piece 18 gauge die-formed, cold rolled steel door, fully gasketed with continuous piano hinge. Also available in stainless steel with brushed finish.
- Standard .156" Pattern 73 tempered glass lens for general illumination.
- Eastman Kodak darkroom safelight filter(s) provided. Consult Kodak website to view filter colors. See below for quantities and filter choices.
- Knurled nickel plated brass thumb screws for easy access.
- Reflector is sealed to insure no stray light can escape and expose film.
- General illumination - up to 200 watt A-21 lamp (by others). Filter compartment - maximum 15 Watt A-15 lamp (by others). This is the


highest wattage recommended by Eastman Kodak. Higher wattage may damage filter. All are 120V.

- Standard baked matte black polyester powder coat paint finish. Multistage pretreatment process.
- Recessed Flange mounting in plaster or drywall ceilings, recessed Grid mounting for 1" T-grid ceilings or Surface mount. Optional plaster frame available for 548F units.
- ETL (US/Canada) listing

### Dimensions


1 GANG			
	SURFACE	GRID	FLANGE
A	10-11/16"	11-13/16"	10-3/8"
B	6"	6"	6"
OA	10-5/8"x10-7/16"x6"	11-13/16"x11-13/16"x6"	10-3/4"x10-3/4"x6"

CEILING OPENING




2 GANG			
	SURFACE	GRID	FLANGE
A	22-11/16"	23-13/16"	22-3/4"
B	6"	6"	6"
OA	22-5/8"x10-7/16"x6"	23-13/16"x11-13/16"x6"	22-3/4"x10-3/4"x6"

CEILING OPENING

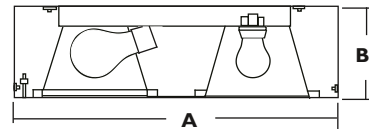


3 GANG			
	SURFACE	GRID	FLANGE
A	34-11/16"	35-13/16"	34-3/4"
B	6"	6"	6"
OA	34-5/8"x10-7/16"x6"	35-13/16"x11-13/16"x6"	34-3/4"x10-3/4"x6"

CEILING OPENING

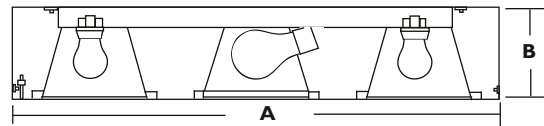

4 GANG			
	SURFACE	GRID	FLANGE
A	22-7/16"	23-13/16"	23-1/8"
B	6"	6"	6"
OA	22-7/16"x22-5/8"x6"	23-13/16"x22-3/8"x6"	22-3/4"x22-3/4"x6"

CEILING OPENING

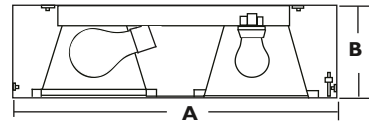

### Green Product Choice: 548F-3DR-10/GBX2

Family	Filter(s)	Size	Options
548F – Recessed Flange 548G – Recessed Grid 548S – Surface	(lamps not included) OC – Light Amber 1 – Red 2 – Dark Red 3 – Dark Green 7B – Green 10 – Dark Amber 13 – Amber GBX2 – Dark Red	1DR – One Compartment (includes 1 filter) 2DR – Two Compartments (includes 1 filter and one lens for general illumination) 3DR – Three Compartments (includes 2 filters and one lens for general illumination) 4DR – Four Compartments (includes 3 filters and one lens for general illumination)	SS – Stainless Steel Housing Brushed Stainless Steel Door SSD – CRS Housing Brushed Stainless Steel Door TP – Tamperproof Screws JB – Rewired junction box mounted on top of 548F or 548G housing (not available on 548S unit)

### Accessories

- PF-548F-1DR – 548F 1 Compartment Plaster Frame
- PF-548F-2DR – 548F 2 Compartment Plaster Frame
- PF-548F-3DR – 548F 3 Compartment Plaster Frame
- PF-548F-4DR – 548F 4 Compartment Plaster Frame