


FLUORESCENT T-8 UPLIGHT OR DOWNLIGHT SWIVEL CLOSED BOTH ENDS - WALL MOUNT PICTURE LIGHT

AL8350

PROJECT NAME

TYPE

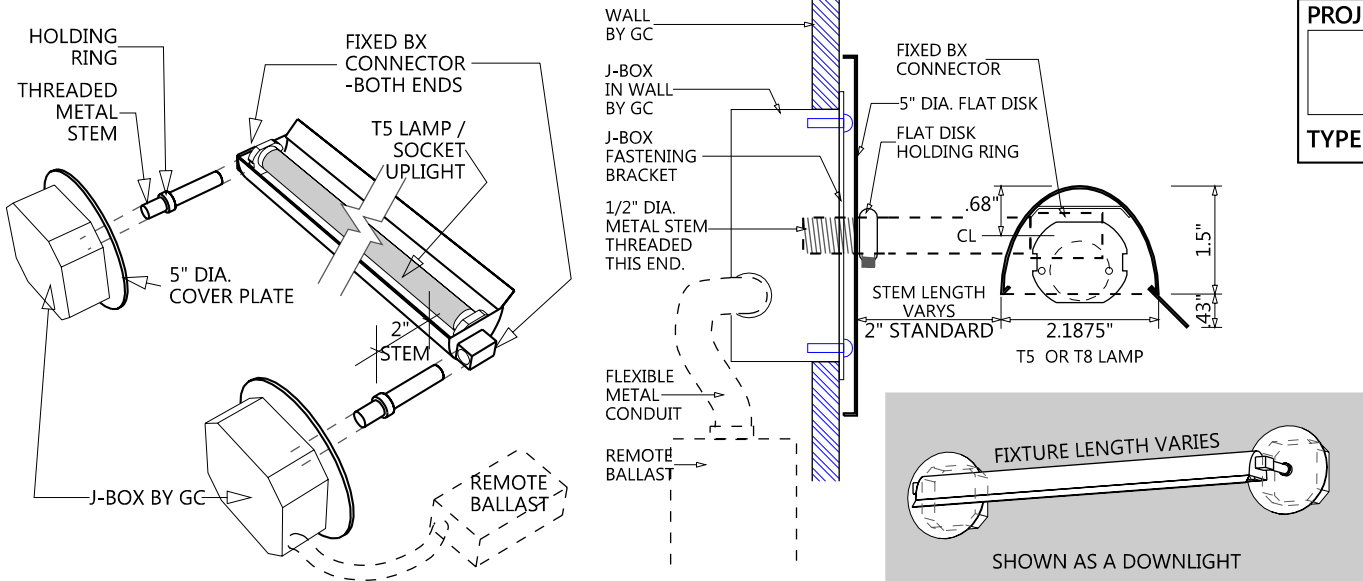

SECTION PROFILE
SCALE: 3/8" = 1"

ACCESS	ELECTRIC	FINISH	CONSTRUCTION
ONE PIECE FACE-PLATE ACCESS WITH SCREWS.	ELECTRONIC REMOTE INDIVIDUAL BALLAST, .98 POWER FACTOR, THD <10%. 12" LEAD TO BALLAST BOX.	BRUSHED STAINLESS STEEL POLISHED STAINLESS STEEL BAKED WHITE ENAMEL CUSTOM COLOR	DIE-FORMED 20 GAUGE COLD ROLLED STEEL WITH ELECTRICALLY WELDED END PLATES. THREADED FIXED BX CONNECTOR WITH ELECTRICALLY WELDED METAL STEM THREADED TO COVER PLATE OF GC J-BOX

ORDERING INFORMATION

Series

AL8350

FOR T5 SERIES SEE AL5530

T-8 Lamp Code

Lamp Code	Overall Length Housing	Center Stem to Center
F40T8	61"	61 5/8"
F32T8	49"	49 5/8"
F25T8	37"	37 5/8"
F17T8	25"	25 5/8"
F15T8	19"	19 5/8"

Voltage

120 or 277

Options

D	DIMMING
UL	UPLIGHT
DL	DOWNLIGHT
EM	EMERGENCY BALLAST
CWB	COLD WEATHER BALLAST 0 DEGREE
LLW	LONGER LEAD WIRE (CONSULT MFG)

CONSULT FACTORY FOR CUSTOM LONG RUNS

FOR LAMPING INFORMATION CLICK HERE

ALL FIXTURES ARE UL LISTED AND BEAR IBEW LABELS. PRODUCTS SUBJECT TO CHANGE WITHOUT NOTICE.