


WL-43041

6/28/2011

Wall Light**WLP**LED Medium Glass Low Profile
Wall Pack**application**

- The LED WLP with its low profile, compact design is excellent for security, accent and perimeter lighting in areas such as building facades, entrance ways, garage doors, indoor parking garages, tunnels, overpasses, and alleys.

construction/finish

- Heavy duty two piece, die cast aluminum housing.
- Silicone gasketing provides protection against moisture.
- Mounts directly to 3-1/2" octagon or 4" square outlet box.
- 1/2" NPS tapped holes provided in three locations for surface conduit entry or optional photo control.
- Polyester powder finish for impact, corrosion and UV resistance.
- Integral cast-in aluminum hinges permit complete removal of lens frame assembly without tools.
- Clear prismatic borosilicate glass refractor is thermal and shock resistant.
- Components are RoHS compliant.
- LED light engine and driver are field replaceable.

electrical

- Certified to meet UL 1598 standards for wet location, 25°C ambient, and feed-through wiring.

warranty

- 5 Year Limited Warranty.

Specifier's Reference

Project

Type

Model No.

Comments

Green Choice: WLP40WLU

WLP	L	U	-
Wattage 40W – 40W Neutral White (4100K) 60W – 60W Neutral White (4100K)			
Voltage U – Universal 120-277 Volts 50Hz or 60Hz			
Family WLP			
Lamp Source L – LED			
Paint Colors Blank – Dark Bronze WT – White BK – Black AL – Silver Aluminum GY – Industrial Gray			

(Consult factory for other colors)

Accessories (Order Separately)

WGWLP – Wire Guard
VCWLP – Cutoff Visor
VSWLP – Vandal Shield
PEC-MT – Photo Control multi-volt
PEC-48 – Photo Control 480 volt
 (For additional descriptions of Wall Light accessories refer to sheet number OA-50030.1)

General Notes:


All options are factory installed.
 All accessories are field installed.
 Data subject to change without notice.

Predicted L₇₀ Lifetime:

25°C Ambient-50,000 hours (based upon LED manufacturer's supplied LM-80 data and in-situ laboratory testing).

PHILIPS
Day-Brite

dimensions

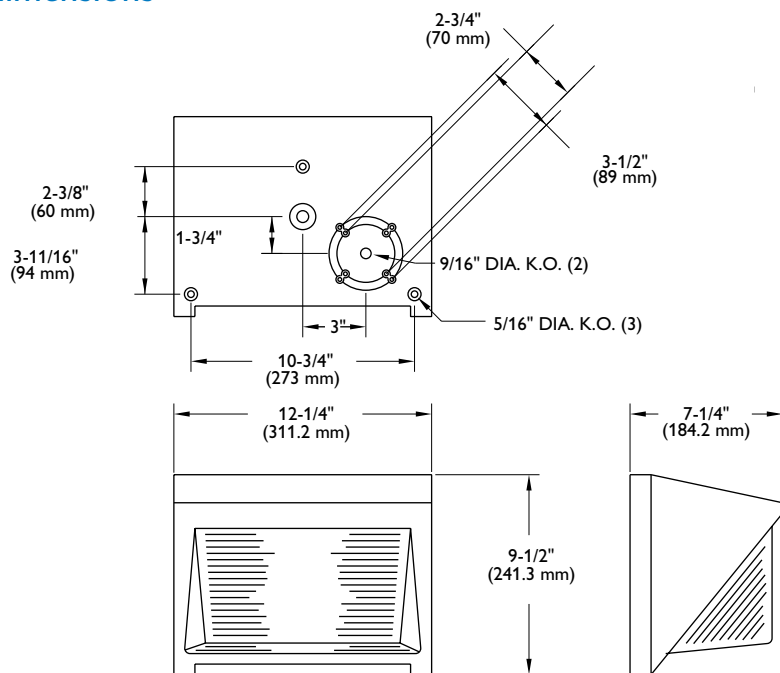


Weight 18 lbs. (max.)

photometry

Light Level Multiplying Factors

Mounting Height	Multiplier
25'	0.36
20'	0.56
15'	1.00
12'	1.56
10'	2.25
8'	3.52

Catalog No.	WLP40WLU
Test No.	29494
Lamp Type	LED
Wattage	42
Lumens	2265
Tilt Angle	0°
Mounting Height	15 Feet

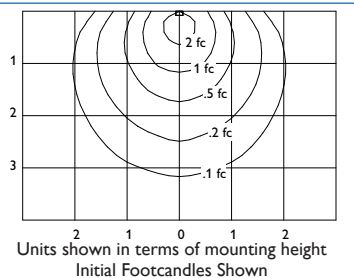

©2011 Philips Day-Brite
All rights reserved.

776 South Green Street • Tupelo, MS 38804
p. 800.234.1890 • f. 662.841.5501 • www.daybrite.com
Canadian Division
189 Bullock Drive • Markham, Ontario L3P 1W4
p. 905.294.9570 • f. 905.294.9811

Contact Factory for Additional Configurations.
Specifications are subject to change without notice.
Consult website for latest version of this spec sheet.

Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled, "Contain Mercury" and/or the symbol "Hg". Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

