

# ELKAY<sup>®</sup>

## SPECIFICATIONS

### Gourmet<sup>®</sup> Single Bowl Sink Models LR, LRQ, LRS and LRSQ Series

#### GENERAL

Highest quality sink formed of #18 (1.2mm) gauge, type 304 (18-8) nickel bearing stainless steel. Top mount.

#### DESIGN FEATURES

LR(Q) Bowl Depth: 8" (203mm) (LR[Q]2521), 7-1/2" (191mm) (LR[Q]1919), 7-5/8" (194mm) (all others).

Coved Corners: 1-3/4" (44mm) vertical and horizontal radius.

Bowl and Faucet Deck Recess: 3/16" (5mm) below outside edge of sink.

Finish: Exposed surfaces are hand blended to a lustrous satin finish.

Underside: Fully undercoated to dampen sound and prevent condensation. LR(Q)2521 is fully protected by heavy duty Sound Guard<sup>®</sup> undercoating.

#### OTHER


Drain Opening: 3-1/2" (89mm).

NOTE: Unless otherwise specified, models with one, two, three or OS4 faucet hole option are furnished with 3 faucet holes as shown; models with choice of one, two, three, four or five faucet hole option are furnished with 4 faucet holes standard.

These sinks comply with ASME A112.19.3.




These sinks are listed by the International Association of Plumbing and Mechanical Officials as meeting the requirements of the Uniform Plumbing Code.

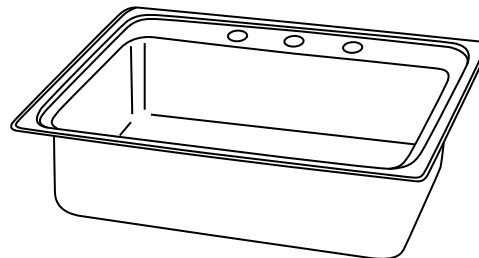


Model LR(Q)22193


#### HOLE DRILLING CONFIGURATIONS

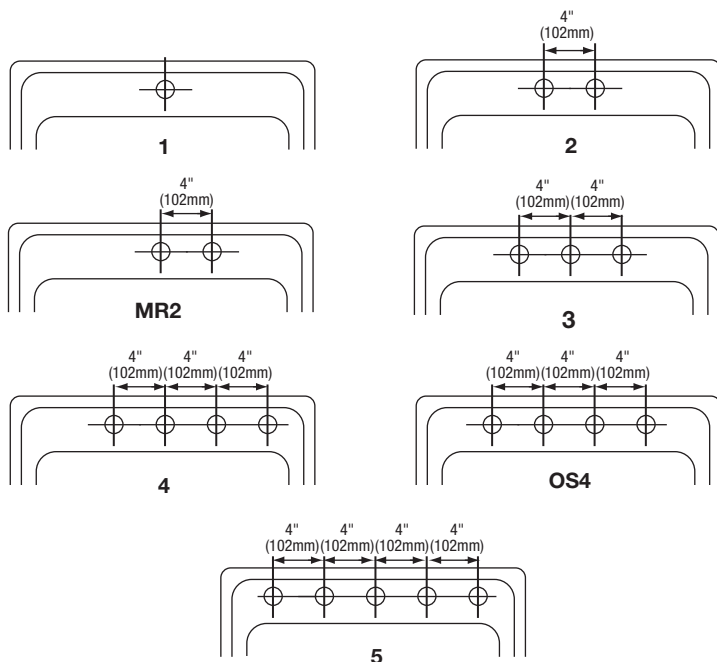

#### Quick-Clip<sup>®</sup> Mounting System

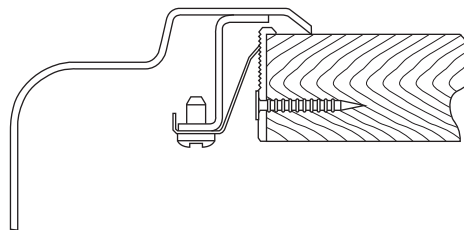

#### U-Channel Type Mounting System

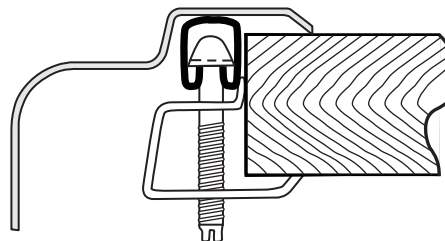

In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkayusa.com](http://elkayusa.com) for most current version of Elkay product specification sheets.

This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.

**Elkay**

[elkayusa.com](http://elkayusa.com)

2222 Camden Court  
Oak Brook, IL 60523

Printed in U.S.A.  
©2008 Elkay

(Rev. 6/08)

1-60I



**Gourmet® Single Bowl Sink**  
**Models LR, LRQ, LRS and LRSQ Series**

**ELKAY®**  
**SPECIFICATIONS**

**SINK DIMENSIONS\***

U-Channel Model Number	Quick-Clip® Model Number	Overall		Inside Bowl			Cutout in Countertop [1 1/2" (38mm) Radius Corners]		No. of 1 1/2" (38mm) Dia. Faucet Holes 4" (102mm) Center	Minimum Cabinet Size
		L	W	L	W	D				
		A	B	C	D	E	L	W		
LR1316	LRQ1316	13 (330mm)	16 (406mm)	10 (254mm)	10 (254mm)	7 5/8 (194mm)	12 3/8 (321mm)	15 3/8 (391mm)	1, 2, MR2 or 3	18 (457mm)
LR1517	LRQ1517	15 (381mm)	17 1/2 (445mm)	12 (305mm)	12 (305mm)	7 5/8 (194mm)	14 3/8 (371mm)	16 7/8 (429mm)	1, 2, MR2 or 3	18 (457mm)
LR1522	LRQ1522	15 (381mm)	22 (559mm)	11 1/2 (292mm)	16 (406mm)	7 5/8 (194mm)	14 3/8 (371mm)	21 3/8 (543mm)	1, 2, MR2 or 3	18 (457mm)
LR1716	LRQ1716	17 (432mm)	16 (406mm)	14 (356mm)	10 (254mm)	7 5/8 (194mm)	16 3/8 (422mm)	15 3/8 (391mm)	1, 2, MR2, 3 or OS4	21 (533mm)
LR1720	LRQ1720	17 (432mm)	20 (508mm)	14 (356mm)	14 (356mm)	7 5/8 (194mm)	16 3/8 (422mm)	19 3/8 (492mm)	1, 2, MR2, 3 or OS4	21 (533mm)
LR1722	LRQ1722	17 (432mm)	22 (559mm)	13 1/2 (343mm)	16 (406mm)	7 5/8 (194mm)	16 3/8 (422mm)	21 3/8 (543mm)	1, 2, MR2, 3 or OS4	21 (533mm)
LR1918	LRQ1918	19 (483mm)	18 (457mm)	16 (406mm)	11 1/2 (292mm)	7 5/8 (194mm)	18 3/8 (467mm)	17 3/8 (441mm)	1, 2, MR2, 3 or OS4	24 (610mm)
LR1919	LRQ1919	19 1/2 (495mm)	19 (483mm)	16 (406mm)	13 1/2 (343mm)	7 1/2 (190mm)	18 7/8 (479mm)	18 3/8 (467mm)	1, 2, MR2, 3 or OS4	24 (610mm)
LR2022	LRQ2022	19 1/2 (495mm)	22 (559mm)	16 (406mm)	16 (406mm)	7 5/8 (194mm)	18 7/8 (479mm)	21 3/8 (543mm)	1, 2, MR2, 3 or OS4	24 (610mm)
LR2219	LRQ2219	22 (559mm)	19 1/2 (495mm)	18 (457mm)	14 (356mm)	7 5/8 (194mm)	21 3/8 (543mm)	18 7/8 (479mm)	1, 2, MR2, 3, 4 or 5	27 (686mm)
LR2222	LRQ2222	22 (559mm)	22 (559mm)	19 (483mm)	16 (406mm)	7 5/8 (194mm)	21 3/8 (543mm)	21 3/8 (543mm)	1, 2, MR2, 3, 4 or 5	27 (686mm)
LR2521	LRQ2521	25 (635mm)	21 1/4 (540mm)	21 (533mm)	15 3/4 (400mm)	8 (203mm)	24 3/8 (619mm)	20 5/8 (524mm)	1, 2, MR2, 3, 4 or 5	30 (762mm)
LR3122	LRQ3122	31 (787mm)	22 (559mm)	28 (711mm)	16 (406mm)	7 5/8 (194mm)	30 3/8 (772mm)	21 3/8 (543mm)	1, 2, MR2, 3, 4 or 5	36 (914mm)
LRS3322	LRSQ3322	33 (838mm)	22 (559mm)	28 (711mm)	16 (406mm)	7 5/8 (194mm)	32 3/8 (822mm)	21 3/8 (543mm)	1, 2, MR2, 3, 4 or 5	36 (914mm)

\*Length is left to right. Width is front to back.



LRQ Series Illustrated